

Standard type for harsh process

01

FEATURE

Available up to
200kL/min.

02

FEATURE

Best for
large wafer and FPD.

03

FEATURE

Durable to
various processes.



Major Products


Spec. / Products*1	SDE1220	SDE20M20	SDE30M20	SDE4060	SDE4030M20	SDE8060	SDE804060
Max. pumping speed [L/min]*2	20,000	30,000	50,000	60,000	80,000	120,000	190,000
Ultimate pressure [Pa]*2	0.5			0.8	0.5	0.8	0.5
Supply voltage (50/60Hz)	3Phase AC200 ~ 220V, 380 ~ 480V						
Dimensions [mm] W*H*L*3	400*780*930	450*950*1000	450*950*1000	750*1200*1600	800*1580*1320	850*1220*1600	1000*1980*1850

*1) Smaller than 20,000L/min pumps are also available. *2) Without N2 purge.

*3) Package size. Dimensions vary by specification.

* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

S-P Curve

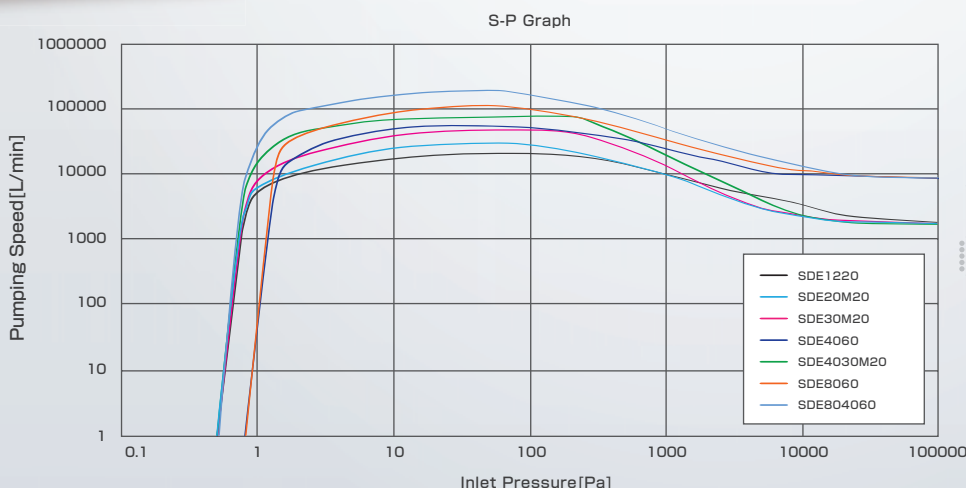

*S-P curves vary by combination.

Contact us

KASHIYAMA INDUSTRIES, LTD.

URL www.kashiyama.com

Japan
[Head Office] TEL +81-267-67-9009
FAX +81-267-67-9015
Email sales@kashiyama.co.jp

USA
TEL +1-510-979-0070
Email sales@kashiyama.com

Korea
TEL +82-31-678-1500

China
TEL +86-21-3895-4599

Taiwan
TEL +886-4-2462-9599