

# SDE-X Series Energy Saver

**Energy saving model;**  
Succeeding standard type's durability against harsh process

**01**  
FEATURE

**Power consumption; 1.3kW\*<sub>1</sub>**  
[54% reduction against conventional type]

**02**  
FEATURE

**Durable to wide range of process**  
by various settings.




## Major Products

Spec. / Products	SDE90X	SDE303X	SDE603X	SDE1203X	SDE20M09X	SDE30M09X
Max. pumping speed[L/min]* <sub>2</sub>	1,300	5,000	10,000	20,000	30,000	45,000
Ultimate pressure[Pa]* <sub>2</sub>	1.3	0.5				
Supply voltage(50/60Hz)	3Phase AC200 ~ 220V, 380 ~ 480V					
Power consumption[kW]* <sub>1</sub>	1.3	1.5	1.6	2.0	2.6	2.8
Dimensions[mm]W*H*L* <sub>3</sub>	370*557*690	400*905*760	400*905*760	400*905*900	460*960*900	500*960*1020

\*1) Approx. value at ultimate pressure. \*2) Without N<sub>2</sub> purge. \*3) Package size. Dimensions vary by specification.

\* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

## S-P Curve

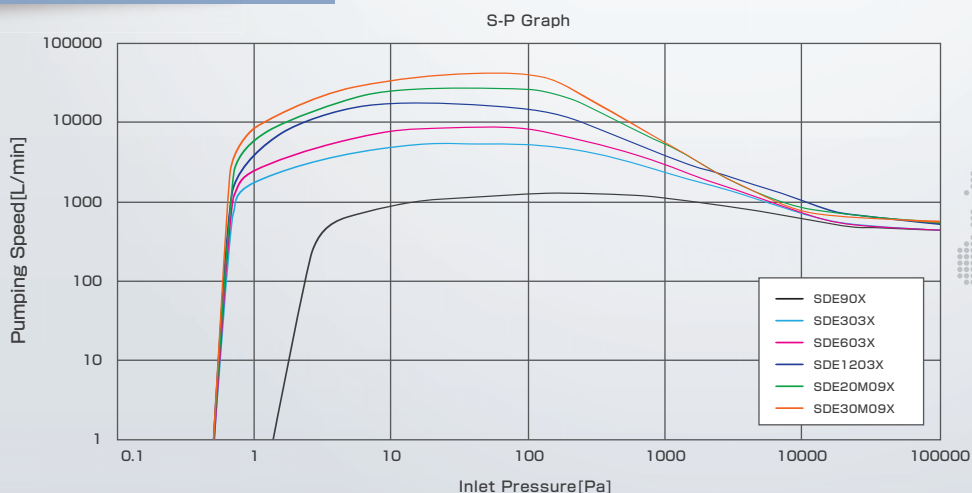

\*S-P curves vary by combination.

## Contact us

**KASHIYAMA INDUSTRIES, LTD.**

URL [www.kashiyama.com](http://www.kashiyama.com)

**Japan**  
[Head Office] TEL +81-267-67-9009  
FAX +81-267-67-9015  
Email [sales@kashiyama.co.jp](mailto:sales@kashiyama.co.jp)

**USA**  
TEL +1-510-979-0070  
Email [sales@kashiyama.com](mailto:sales@kashiyama.com)

**Korea** TEL +82-31-678-1500

**China** TEL +86-21-3895-4599

**Taiwan** TEL +886-4-2462-9599